

## General features

The main feature of these machines is the L-shaped vertical sealing bar, which can guarantee the same pressure on all parts of the film and replaces the old scissor-shaped bar.

DM Pack L-sealers can be equipped with different types of infeed and outfeed conveyors (flighted, with pushers, intralox, etc.), pushers, feeders (shuttle or rotary), stackers, shrink tunnels and many other optionals.

## Specific features

The bar, which is only 10 mm thick, enables to tightly wrap the product using a limited film quantity. L-sealers can work with both polyolefin and, using a special bar, also with polyethylene. The "Combo" version (with integrated shrinking tunnel) takes up very little space.

## Technical features

Mod.	530	530T	530CS	530CST	560CST
Width of Sealing Bars:	350 X 500 mm	350 X 500 mm	350 X 500 mm	350 X 500 mm	500 x 650 mm
Product's Max. Width:	300 mm	300 mm	300 mm	300 mm	420 mm
Product's max. Length:	450 mm	450 mm	450 mm	450 mm	650 mm
Product's max Height:	150 mm	150 mm	240 mm	170 mm	200 mm
FLAT Film Width:	550 mm	550 mm	550 mm	550 mm	650 mm
Reel Diameter:	350 mm	350 mm	350 mm	350 mm	350 mm
Speed:	45 p/min	45 p/min	45 p/min	45 p/min	45 p/min
Working height:	900 +/- 50mm	900 +/- 50mm	900 +/- 50mm	900 +/- 50mm	900 +/- 50mm
Weight:	500 kg	700 kg	550 kg	750 kg	750 kg
Machine's dimensions:	L1715 x W1200 x H1450mm	L2700 x W1300 x H1450mm	L1715 x W1200 x H1450mm	L2700 x W1300 x H1450mm	L2700 x W1300 x H1450mm

Mod.	560T	560CS	560	560TECO	790CS
Width of Sealing Bars:	500 x 650 mm	500 x 650 mm	500 x 650 mm	500 x 650 mm	750 x 950 mm
Product's Max. Width:	420 mm	420 mm	420 mm	420 mm	700 mm
Product's max. Length:	650 mm	650 mm	650 mm	650 mm	950 mm
Product's max Height:	170 mm	240 mm	200 mm	150 mm	240 mm optional up to 400
FLAT Film Width:	650 mm	650 mm	650 mm	650 mm	950 mm
Reel Diameter:	350 mm	350 mm	350 mm	350 mm	350 mm
Speed:	45 p/min	45 p/min	45 p/min	45 p/min	45 p/min
Working height:	900 +/- 50mm	900 +/- 50mm	900 +/- 50mm	900 +/- 50mm	900 +/- 50mm
Weight:	700 kg	550 kg	600 kg	600 kg	700 kg
Machine's dimensions:	L2700 x W1300 x H1450mm	L1715 x W1200 x H1450mm	L1715 x W1200 x H1450mm	L1715 x W1200 x H1450mm	L2300 x W2000 x H1550mm

## Details



The L-vertical bar ensures the same pressure on the film, replacing the old scissor-system.



Sealing bar width only 1 cm for a uniform sealing, low film and energy consumption.



Flo L-sealer is available with integrated or separated shrinking tunnel.



Intuitive touch screen allows an easy format change, sealing centering and forming triangle height adjustment.



Small and irregular shape products can be packed thanks to the optional kissing conveyors.



Great space saving with the compact Combo version.



Easy accessible film dispenser and film wind up units thanks to front position and the sliding door.



Machine is equipped with wheels in order to be easily relocated.



High quality components, ISO certified.



# FLO

### DM Pack S.r.l.

Plant: Via dell'Artigianato, 34 - 36030 San Vito di Leguzzano (VI) Italy

Contacts: Tel. + 39 0445 580093 - Fax + 39 0445 584609 - Tel. e Fax + 39 0445 602907 -info@dmpack.it - www.dmpack.it


EN

Automatic L sealer packaging machines

# FLO

The innovative vertical sealing bar, replacing the old scissor closing system, ensures a perfect sealing, by giving the same pressure while closing to seal.

Available with integrated or separated shrink tunnel.

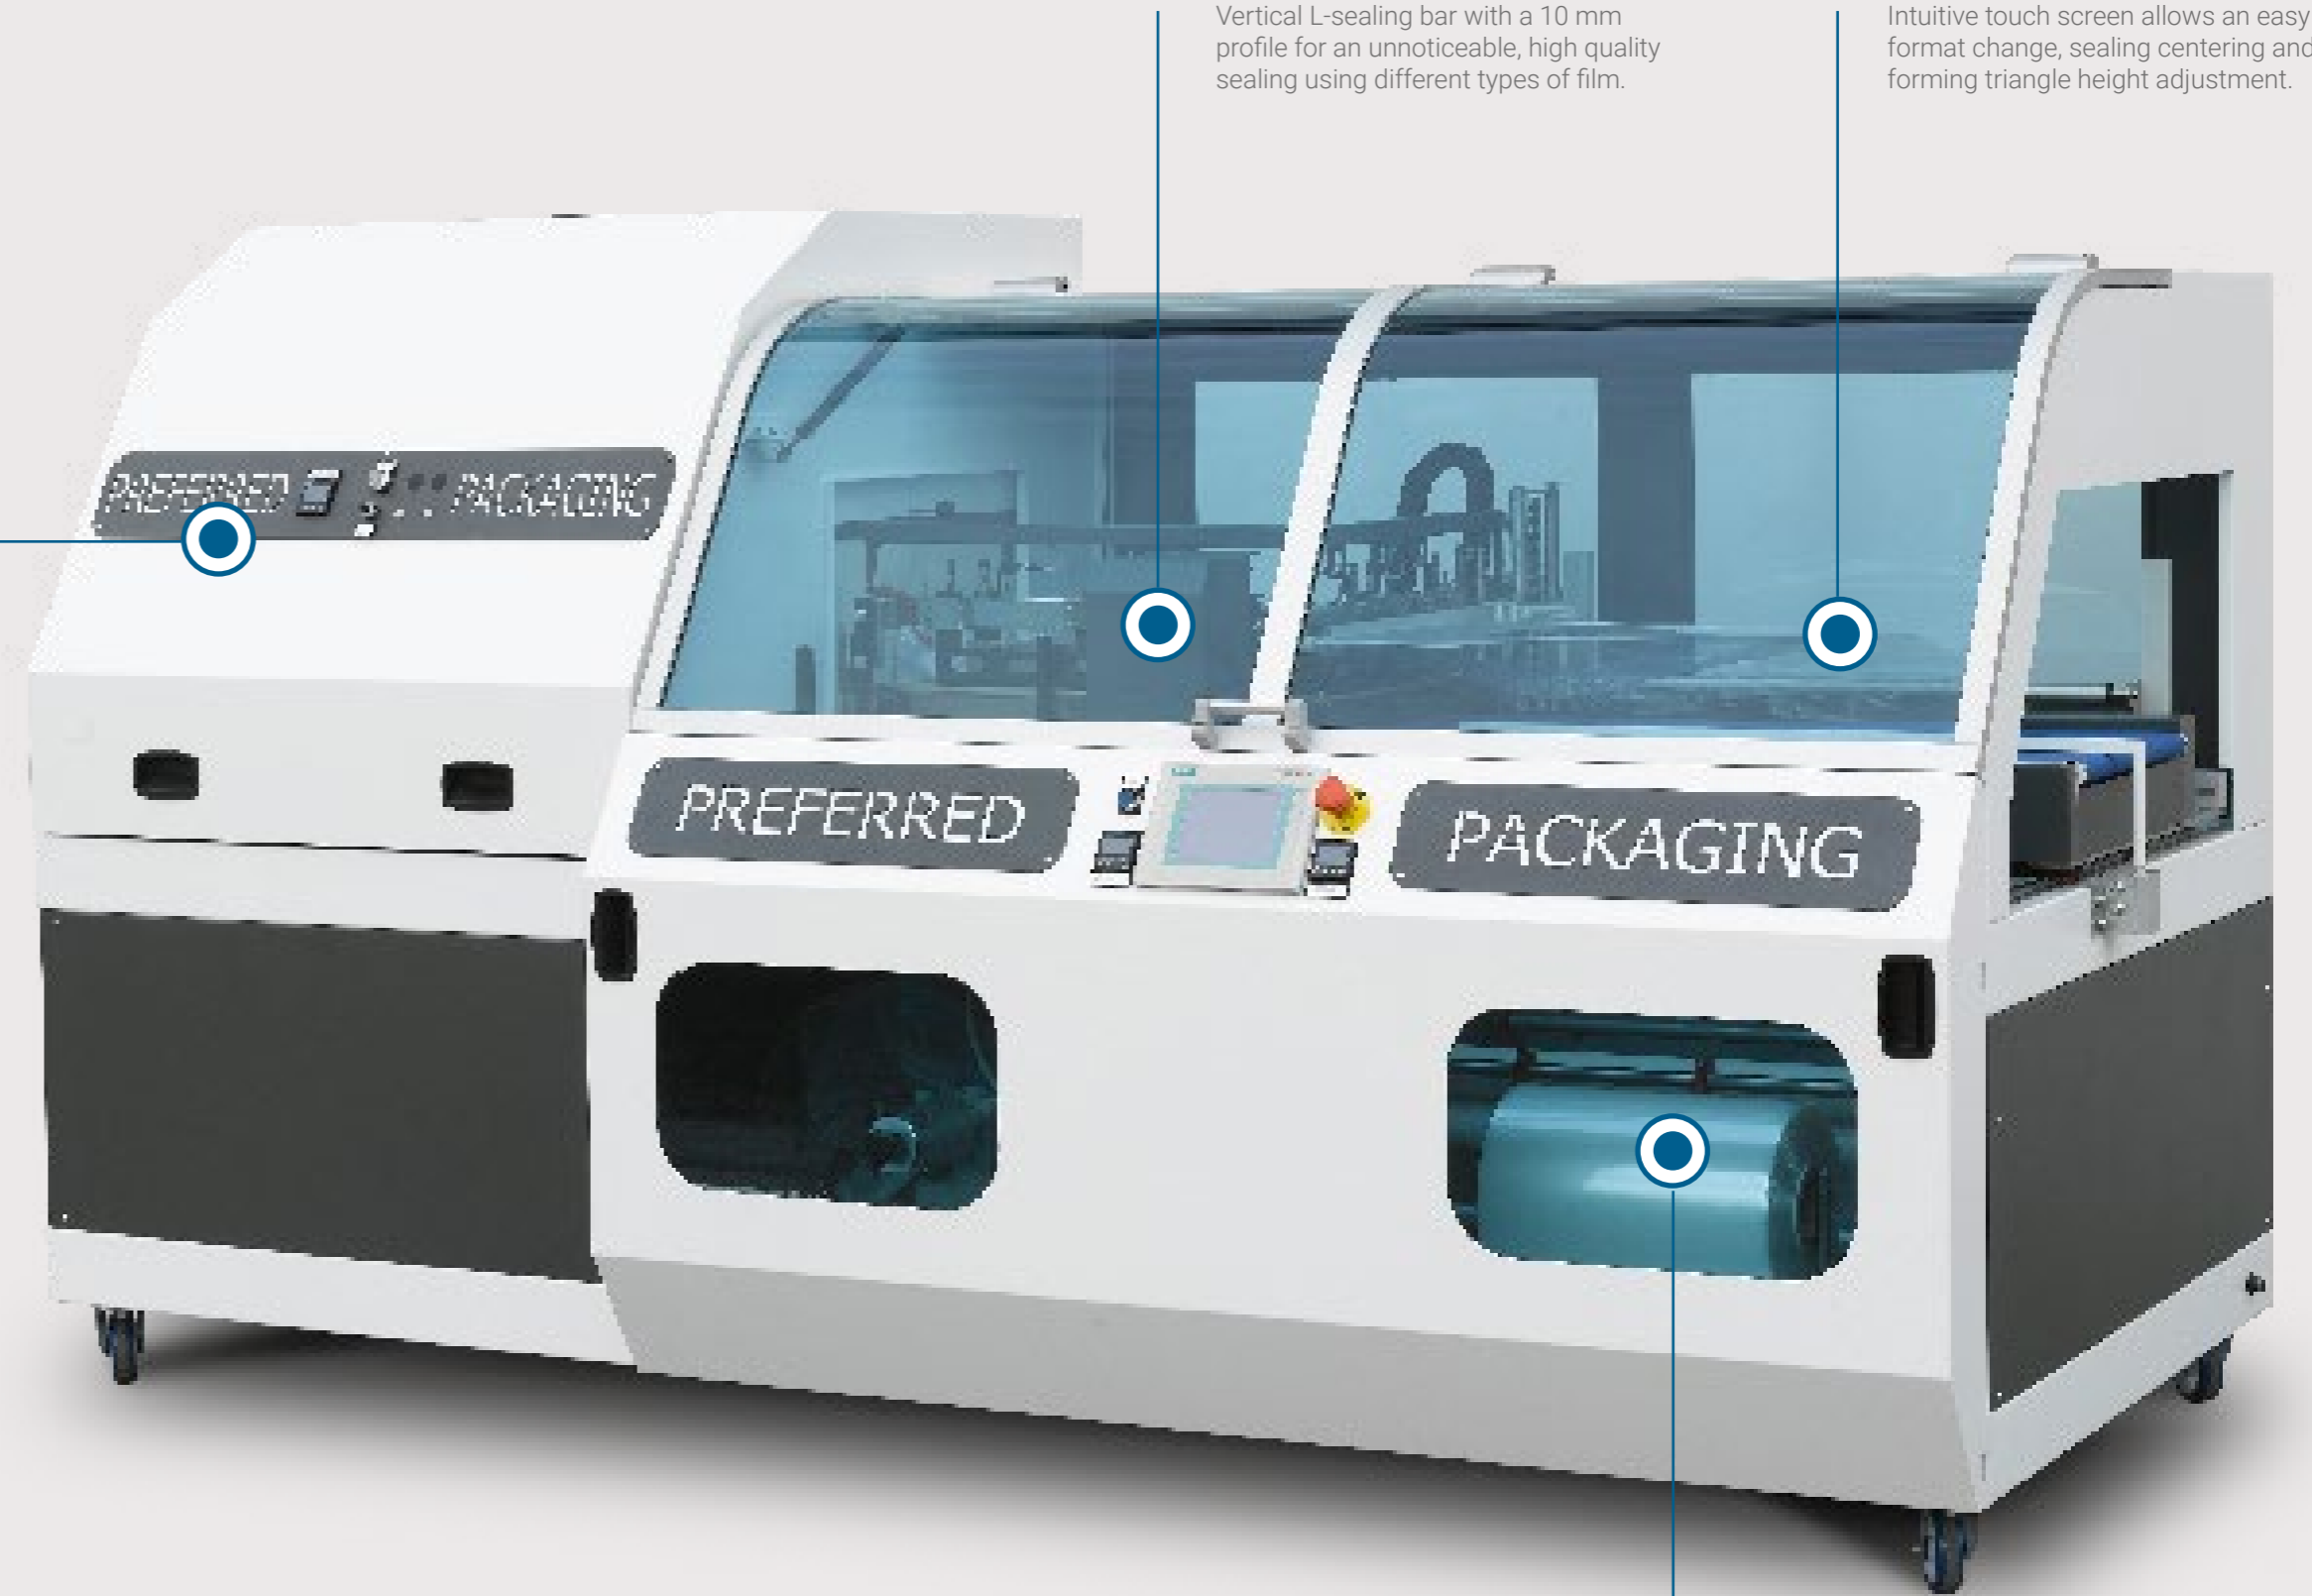

Vertical L-sealing bar with a 10 mm profile for an unnoticeable, high quality sealing using different types of film.

Intuitive touch screen allows an easy format change, sealing centering and forming triangle height adjustment.

Sliding door with easy access to film dispenser and wind up unit.

High quality components, ISO certificated

SIEMENS ABB OMRON HIWIN MOTOVARIO KUHNKE pizzato MITSUBISHI