


## General features

Vertical inclination from 0° to -90°, with rapid adjustment thanks to a simple handle. A different change in inclination varies the product falling speed. Machine can work in a horizontal and vertical position, based on the type of product. Ideal for products such as fruit and vegetables, bread, sweets, seafood or fresh products, meat, food and non-food products, such as small accessories or small profiles; single or multiple products.

## Technical features

The formation tunnel of the machine is easily adjustable and adapted to an ample series of measures and products, thanks to the wide packaging film reel: up to 680 mm wide. The film can vary in type: polypropylene, polyethylene, perforated or non-perforated film. The packaging is possible thanks to the two pairs of lower wheels, motorised and sealing, and a mechanical seal bar. The same ISO certified components are used for our standard packaging machines. All the parts in contact with the products are in stainless steel.


## Dettagli

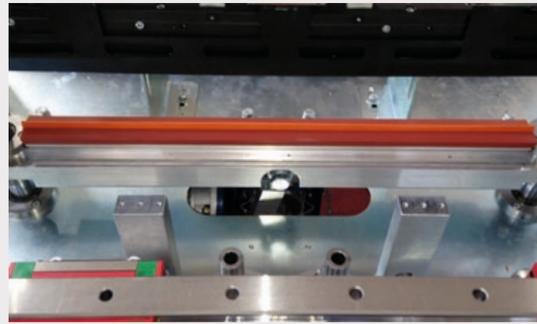

Motorised seal bar for use with PE and BOPP film.



Adjustable bag measurement. All movements on linear guides.

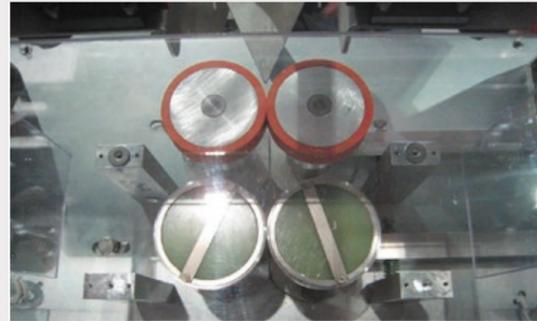

Sealing wheels for sealing and stretching film.



Version available in stainless steel.

## Technical Features

Mod.	ZED
Film width:	max 680 mm
Sealing bar width:	400 mm
Max bag width:	150 mm
Power installed:	2 kw
Power supply:	400 V 50/60 hz 3 ph + N + G (upon request other voltages are available)
RAL	9007



Tilting surface from 0° to 90° and precise product detecting through barrier electric eye



A tunnel suitable for packaging many types of different products in a vast RANGE of measurements.

### DM Pack S.r.l.

Sede operativa: Via dell'Artigianato, 34 - 36030 San Vito di Leguzzano (VI) Italy

Contatti: Tel. + 39 0445 580093 - Fax + 39 0445 584609 - Tel. e Fax + 39 0445 602907 - info@dmpack.it - www.dmpack.it



# ZED

EN

Inclinable packaging machines

# ZED

Semi-automatic inclinable or vertical packaging machine. Ideal for products inside formed bags starting with flat film (VFFS) which is sealed, joining the 2 flaps, longitudinally by the continuous sealing system. The two ends are sealed and cut by transversal bars. Manual or automatic activation, with the possibility of integrating various loading and filling systems of the bag in automatic mode.

High quality components, ISO certificated



Adjustable forming for film opening or fixed forming tube.

All the surfaces in contact with the product are in stainless steel, as standard. Version available completely in stainless steel.

Small and versatile. Easy to adjust. Manual function with button/pedal or automatic using product reading. Siemens keypad.

Tilting surface from 0° to 90° or vertical.

Reel in high position and easily replaced for fast format change.

Can be used in the food and non-food sector.

